



CATALOGUE 2026

Timeless quality

Wall-mounted electric storage water heaters



www.fismaritalia.it

Wall range · 10 – 100 L

The range

Fismar designs wall-mounted electric storage water heaters with porcelain-enamelled tanks, built to last. Four lines for every installation and capacity need, from compact sink units to high-efficiency models.



AQVO mini

10 · 15 · 30 L

3 years warranty

Class B

03



AQUALIS NEO

30 · 50 · 80 · 100 L

3 years warranty

Class C

04



AQUALIS

50 · 80 · 100 L

7 years warranty

Class C

05



AQUALINE

30 · 50 · 80 L

5 years warranty

Class B

06

AQVO mini



Wall-mounted electric storage water heater · 10 · 15 · 30 L

Compact, above and under sink

PORCELAIN-ENAMEL PROTECTION



- ✓ Stainless steel heating element
- ✓ External plastic casing
- ✓ Temperature setting
- ✓ Above- and under-sink versions (10 · 15 L)
- ✓ Glass-lined tank
- ✓ Integrated power LED

PORCELAIN-ENAMEL PROTECTION



Glass-lined tank



CFC-free insulation




Magnesium anode



Temperature setting



Triple safety

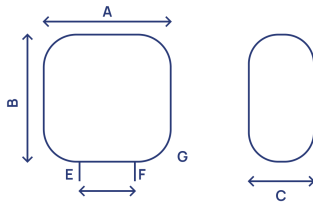

A width · B height · C depth · D recess · E-F fittings distance · G threaded connection 1/2"

MODEL	INFO	LITRES	DIMENSIONS (MM)							WATT	PRESSURE (BAR)	WEIGHT NET (KG)	WEIGHT GROSS (KG)	HEATING TIME (min)	CONT. QTY (40HQ)
			A	B	C	D	E	F	G						
FSAM10	Above sink	10	341	341	298	100	101	364	1/2"	1500	8	7,1	8,7	32	900
FSAM10S	Under sink	10	341	341	298	100	101	364	1/2"	1500	8	7,1	8,7	32	900
FSAM15	Above sink	15	366	366	311	100	118	389	1/2"	1500	8	7,9	9,8	43	840
FSAM15S	Under sink	15	366	366	311	100	118	389	1/2"	1500	8	7,9	9,8	43	840
FSAM30	Above sink	30	456	456	376	100	131	479	1/2"	1500	8	12,6	14,7	74	700

AQUALIS NEO



Wall-mounted electric storage water heater · 30 · 50 · 80 · 100 L


White cover · porcelain-enamelled cylindrical tank

6-BOLT FLANGE



- ✓ Energy class C
- ✓ LED charge indicator
- ✓ Retains heat for a long time
- ✓ High-efficiency insulation
- ✓ Stainless steel element
- ✓ Independent thermostat and safety

PORCELAIN-ENAMEL PROTECTION

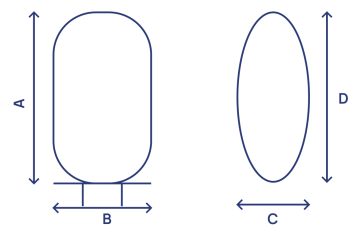

A height · B width · C depth · D total footprint

MODEL	LITRES	DIMENSIONS (MM)				POWER	NET WEIGHT (KG)	GROSS WEIGHT (KG)	HEATING TIME	CONTAINER QTY
		A	B	C	D					
FSA30V NEO	30	431	380	398	502	1500 W	12,7	14,3	72	600
FSA50V NEO	50	475	450	468	560	1500 W	15,5	17,5	120	480
FSA80V NEO	80	700	450	468	785	1500 W	23,5	25	192	360
FSA100V NEO	100	850	450	468	935	1500 W	28	31	240	250
FSA50H NEO	50	475	450	468	560	1500 W	15,5	17,5	120	480
FSA80H NEO	80	700	450	468	785	1500 W	23,5	25	192	360
FSA50HSX NEO	50	475	450	468	560	1500 W	15,5	17,5	120	480
FSA80HSX NEO	80	700	450	468	785	1500 W	23,5	25	192	360

AQUALIS



Wall-mounted electric storage water heater · 50 · 80 · 100 L

Light grey cover · high-efficiency copper element

6-BOLT FLANGE



- ✓ Energy class C
- ✓ LED charge indicator
- ✓ Retains heat for a long time
- ✓ High-efficiency insulation
- ✓ High-efficiency copper heating element
- ✓ Independent thermostat and safety

PORCELAIN-ENAMEL PROTECTION

6-bolt flange


Magnesium anode

Universal bracket

Porcelain-enamelled tank

Temperature setting

Charge indicator

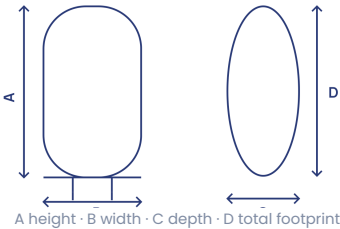

MODEL	LITRES	DIMENSIONS (MM)				POWER	NET WEIGHT (KG)	GROSS WEIGHT (KG)	HEATING TIME	CONTAINER QTY
		A	B	C	D					
FSA50V	50	506	460	468	547	1500 W	17	19,6	120	456
FSA80V	80	716	460	468	757	1500 W	24	26	192	335
FSA100V	100	856	460	468	897	1500 W	27,9	30,4	240	246

AQUALINE



Electric storage water heater · slim twin tank · 30 · 50 · 80 L

Twin tank · slim design · digital display

SUPER FAST FUNCTION 2000 W



- ✓ Touch keys and digital display
- ✓ Triple power 800 · 1200 · 2000 W
- ✓ Anti-legionella and ECO function
- ✓ Twin tank, slim model
- ✓ High-efficiency copper element
- ✓ Timer and precision capillary thermostats

SUPER FAST FUNCTION · 2000 W

PORCELAIN-ENAMEL PROTECTION



Touch keys



Timer



Triple power




Twin tank



Anti-legionella



ECO function

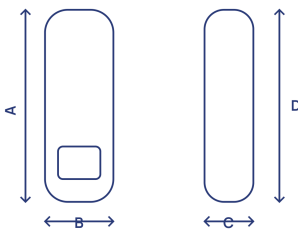


A height · B width · C depth · D total footprint

MODEL	LITRES	DIMENSIONS (MM)				POWER	NET WEIGHT (KG)	GROSS WEIGHT (KG)	HEATING TIME	CONTAINER QTY
		A	B	C	D					
AQL30	30	650	410	279	665	2000 W	21,1	24,2	72	408
AQL50	50	713	520	339	728	2000 W	26,9	29,9	120	272
AQL80	80	969	520	339	984	2000 W	35,4	38,5	192	216

Selection and installation guide

Choosing the right water heater is simple: consider capacity, installation and your home's hot water needs.

1. INSTALLATION TYPE



ABOVE SINK

Ideal for small spaces. Compact models (10–30 L) install easily above the point of use.



UNDER SINK

Perfect to preserve aesthetics and save space in small rooms. Available for 10 and 15 L models.



VERTICAL INSTALLATION

The most common solution for larger capacities (30–100 L). Wall-mounted.

2. RECOMMENDED CLEARANCES

For correct installation and easy maintenance, keep minimum clearances around the heater: ≥ 300 mm above, ≥ 200 mm on the sides, ≥ 500 mm below.



IMPORTANT

Always install the safety unit (supplied) on the cold-water pipe. Provide a discharge drain.

TIP

Correct periodic maintenance extends product life and keeps it efficient over time.

3. WHY CHOOSE FISMAR



PORCELAIN-ENAMEL PROTECTION

Corrosion-resistant tank.



QUALITY COMPONENTS

Materials selected to last.



ENERGY EFFICIENCY

High-efficiency insulation, low consumption.



WARRANTY UP TO 7 YEARS

Certified safety and reliability.



DEDICATED SERVICE

Technical support always available.



Hot water, tailored to you.

Choose Fismar: comfort and reliability every day. Hot water always available, in total safety.

FISMAR



**Hot water,
tailored to you.**

ADDRESS

Via Montefiorino 4, 05018 Orvieto (TR), Italia

E - MAIL

info@fismaritalia.it

WEB

www.fismaritalia.it